

P1

Maintenance SOP


Process	assembly process		Publish time	26-Sep-23	Page 5
			Tools and equipment		
	Repair tool		Tweezers, gloves, screwdriver, soldering wire, soldering iron, Finger cots, Anti-static bracelet		
1	Remove screen and motherboard		Tweezers, gloves, screwdriver, soldering wire, soldering iron, Finger cots, Anti-static bracelet		
2	Remove speaker		Tweezers, gloves, screwdriver, soldering wire, soldering iron, Finger cots, Anti-static bracelet		
3	Residual sump		Tweezers, gloves, screwdriver, soldering wire, soldering iron, Finger cots, Anti-static bracelet		
Prepared by		Review	Approved	Edition	Change content
SEAN		JL XU	Peter	A/0	Original Issue

Pad Disassembly tool




Disassembly tools: electric soldering iron, soldering wire, screwdriver, tweezers

1 Remove the screen and motherboard (Screen removal video:<https://mega.nz/file/uO4XnYRZ#5BI0Ez3i7x70ya06mTsnLYxVxO0LTIYgWpOEFjS7O5U>)

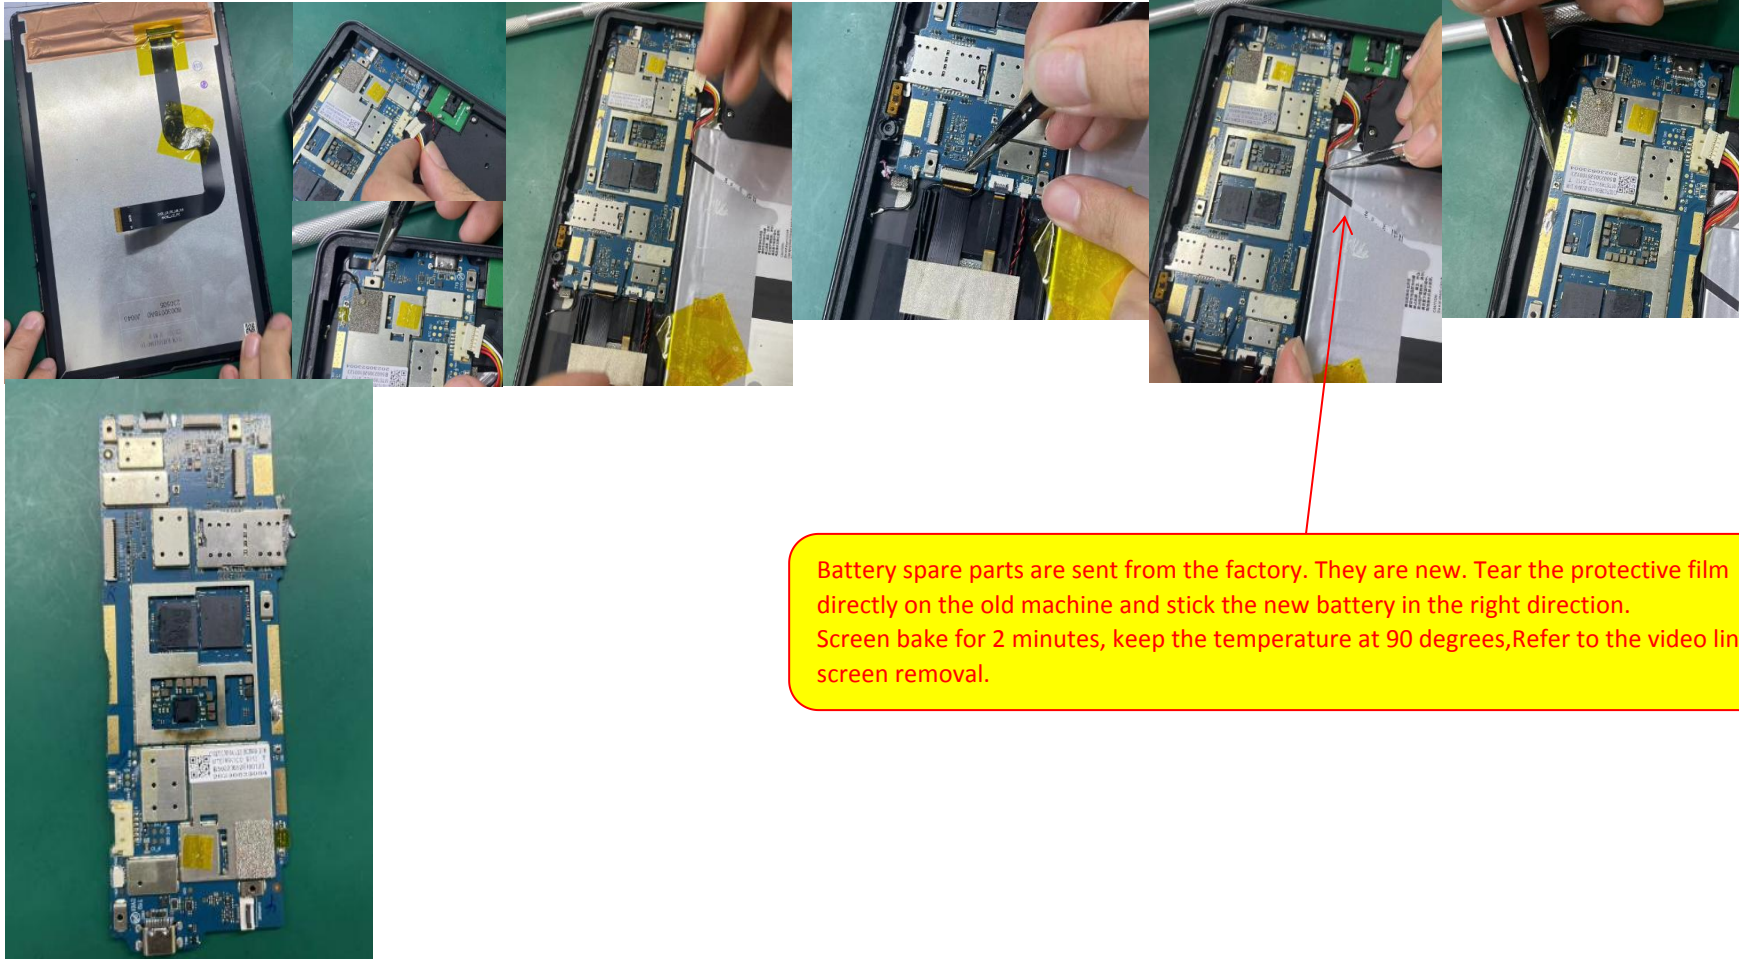

Battery spare parts are sent from the factory. They are new. Tear the protective film directly on the old machine and stick the new battery in the right direction. Screen bake for 2 minutes, keep the temperature at 90 degrees, Refer to the video link for screen removal.

2 Remove speaker

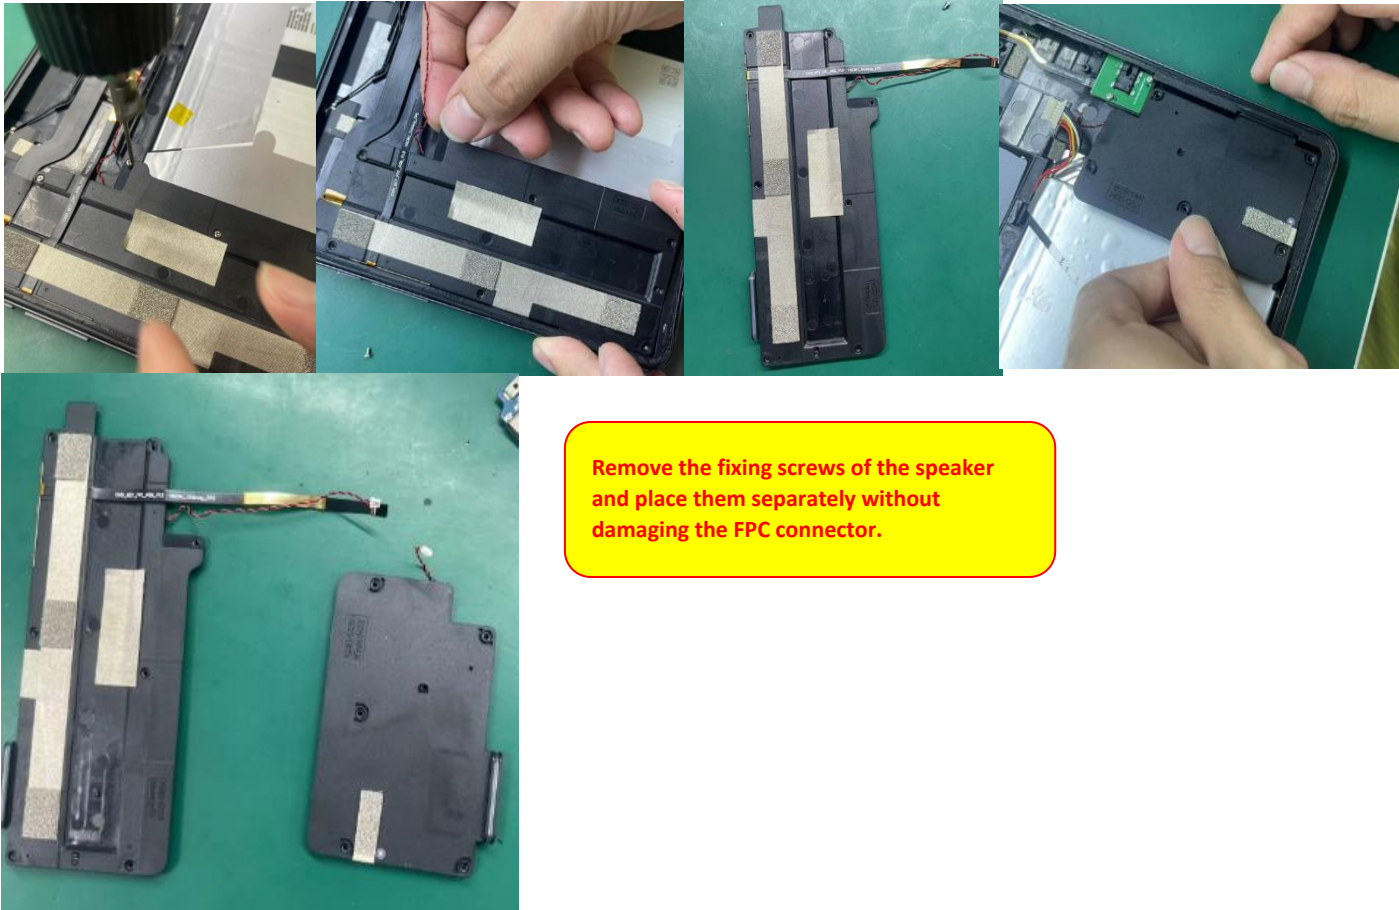

Remove the fixing screws of the speaker and place them separately without damaging the FPC connector.

3 Residual sump



Remove the battery (can refer to the video), remove the main camera, remove the USB interface, and leave a bottom shell, this bottom shell factory is an accessory can be shipped.